




## MOTOR SPECIFICATIONS

Part Number	<b>BL23E33-01D-RO</b>
Dimension "A" Max	3.29 in [83.5mm]
Rated Voltage	24 VDC
Rated Torque	41.07 oz-in [0.29N-m]
Rated Speed	4000 RPM
Rated Power	120 Watts
Rated Current	6.9 Amps
Peak Torque	82.13 oz-in [0.58N-m]
Peak Current	13.8 Amps
Torque Constant (kt)	5.95 oz-in/Amp
Back EMF Constant (Ke)	4.23 Vp/KRPM
Motor Constant (Km)	14.02 oz-in/√W [0.099 N-m/√W]
Resistance	0.18 Ohms
Inductance	0.18 mH
Rotor Inertia	1.53 oz-in <sup>2</sup>
Weight	2.38 lb [1.08 kg]
Electrical Time Constant	1 ms
Mechanical Time Constant	3 ms


## DIMENSIONS

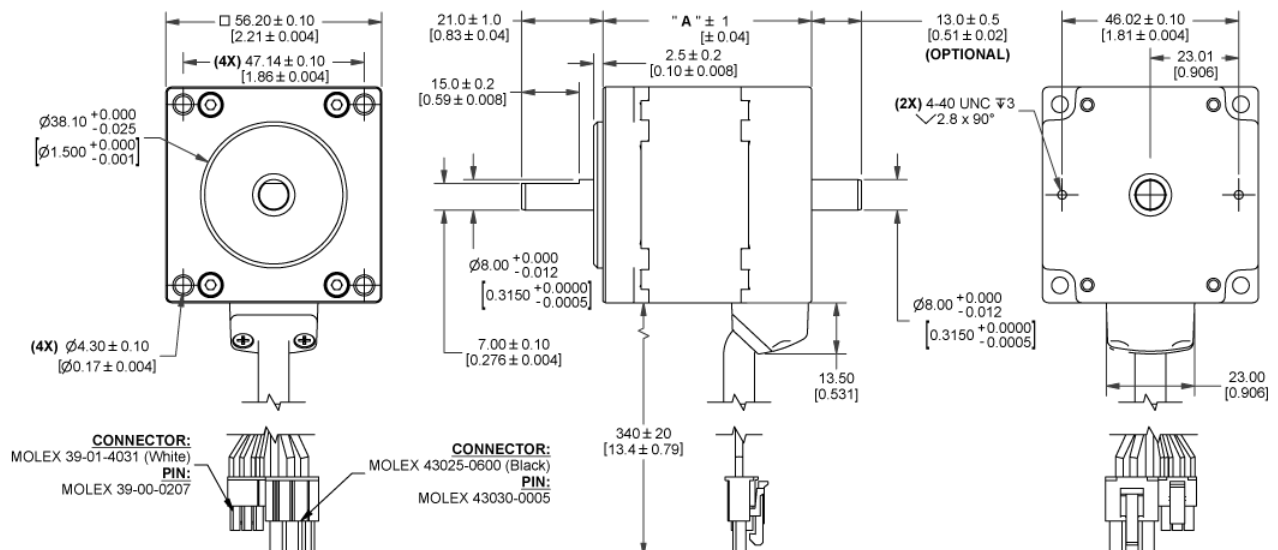

# PERFORMANCE CURVE

## BL23E33-01

Rated Voltage: 24Volts, Rated Current: 6.9 Amps

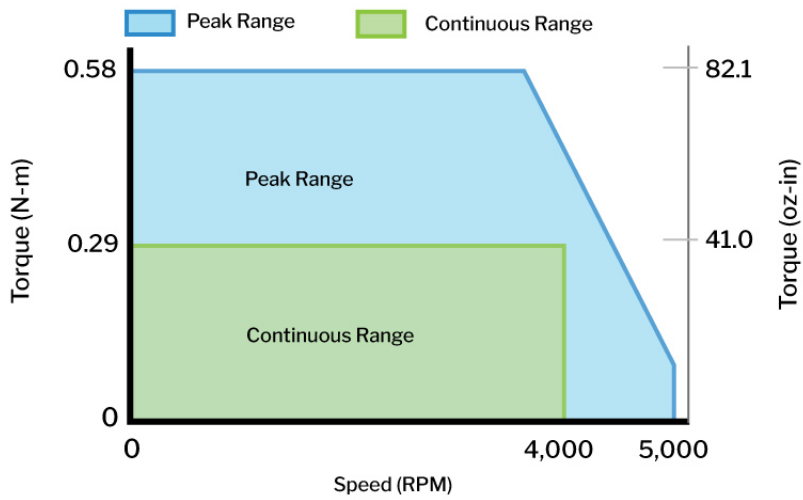


# PIN OUT CHARTS


PIN #	COLOR	PHASE
1	RED	VCC (+5V)
2	YELLOW	HV
3	BLUE	HW
4	BLACK	GND
5	ORANGE	HU

PIN #	COLOR	PHASE
1	BLUE	W
2	ORANGE	U
5	YELLOW	V


# OPERATION & USAGE TIPS




**Do not** disassemble motors; a significant reduction in motor performance will occur.



**Do not** machine shafts; this will have a negative effect on shaft run out and perpendicularity.



**Do not** disconnect motor from drive while in operation.



**Do not** use holding torque/detent torque of motor as a fail safe brake.



**Do not** hold motor by lead wires.



**Do not** exceed the rated current; this will burn the motor.

FAILURE TO COMPLY WITH THESE RECOMMENDATIONS WILL VOID ALL WARRANTY TERMS

# Motion Control, **Solved.**

## MOTOR ENGINEERING & MANUFACTURING



Optimized  
For Your  
Application



Quick  
Prototype  
Turnaround



Small Batch  
to OEM Volume  
Production



US Based  
Support &  
Manufacturing